

## Bollard 027



027-1 | CAST ALUMINIUM | 600 mm

027-2 | CAST ALUMINIUM | 870 mm

### Specifications

Cylindrical bollard with a groove at the top and a cylindrical base.  
Made from polished or painted cast aluminium.

### Mounting

Removable with 3p-Technologie, comprising a 300 mm ground shell, junction piece with pre-determined breaking point (without anti-roll device), 1 clamping cone with internal thread, 1 clamping cone without internal thread and a hex head bolt as a standard.

Alternatives: concrete embedment or fold down

### Ground rosette option

- Completely covers the ground shell, unauthorised removal is prevented by small hooks
- Material: Steel ST37, hot-dip galvanised and powder coated in bollard colour
- For surcharge, see online-shop "Components"

### Finish


- Powder coating in standard RAL colours or DB 703
- Accessories and special requirements such as different colours, red and white paint, reflective film or powder coating of chains, rings, shackles, etc. in the same colour as the bollard are available on request at a surcharge.
- For details, see catalogue p. 2-23, price list or online-shop
- Extended junction piece required for 3p-High

### Special models

Embellished with logo



### Optional rosette




### Measurements

Height above ground level: 600 mm | 870 mm

Diameter: 85 mm/98 mm

Height ground shell: 300 mm or 500 mm

Weight: approx. 7 kg | 10 kg (for fixed mounting + 1.5 kg)

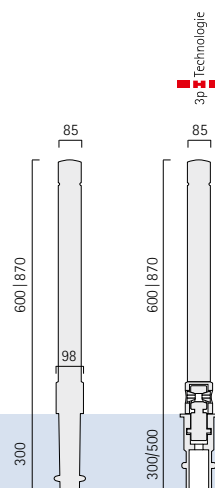

Colour: DB 703, Design: "hammer.runge design"